


SR SPRINT SANDWICH

OUTDOOR FLOORING

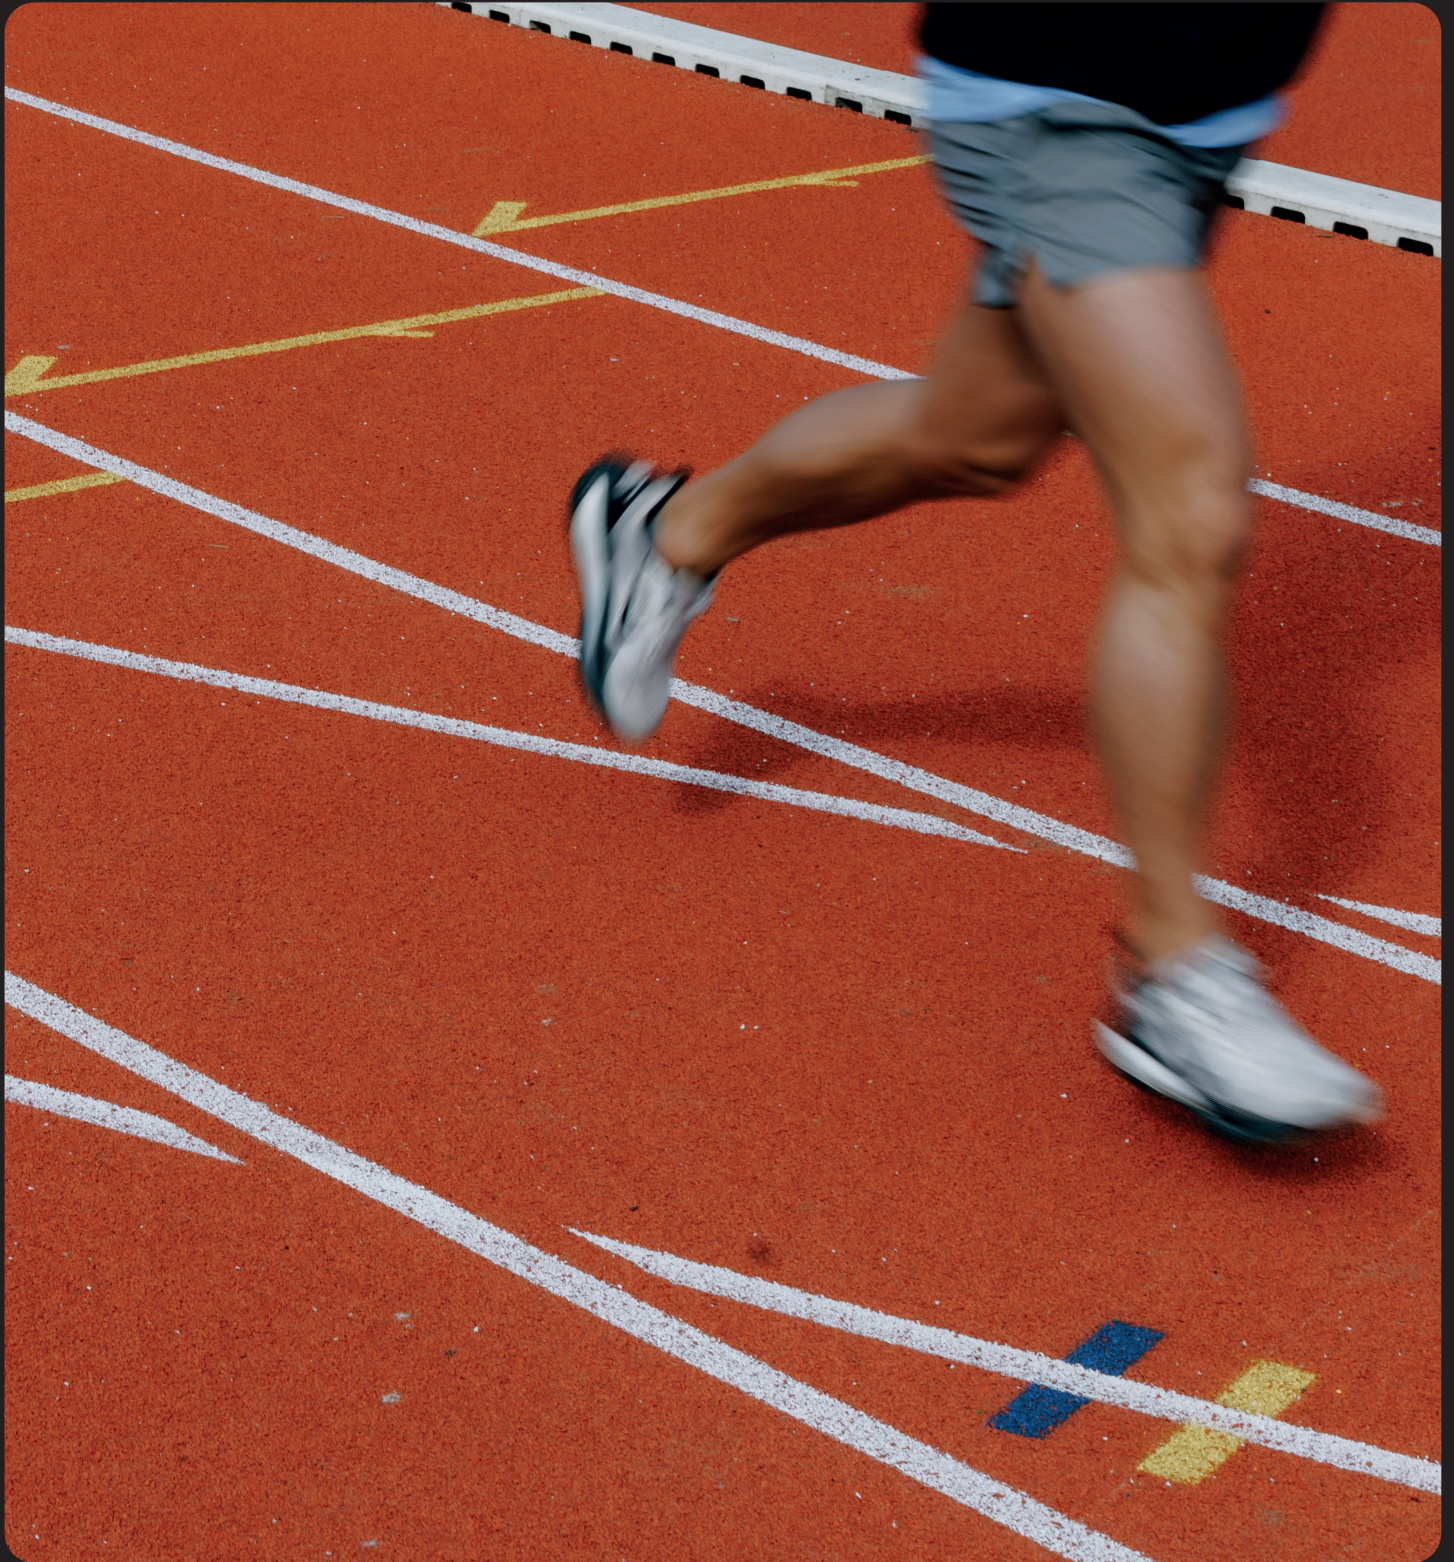

The.

Flooring.

Standard.

HERCULAN

World Athletics Certified

A FLAWLESS PERFORMING ATHLETICS TRACK


The Herculan SR Sprint sandwich system is a seamless athletics track with point-elastic characteristics. It is engineered with the athlete's comfort in mind. Listed on the World Athletics Register of Certified and Classified Track Surfaces, Herculan SR Sprint is highly suitable for both national and international competitions.

The system consists of an in-situ installed SBR base layer, topped with a durable, highly flexible polyurethane coating and broadcast with coloured EPDM granules. This carefully engineered construction creates a strong, high-performing surface that combines excellent energy return with optimal shock absorption.

Herculan SR Sprint sandwich is water-permeable, spike resistant, and fully weatherproof, ensuring reliable performance in every climate. With its superb longevity, it is an excellent choice for competition venues, training facilities, and multi-purpose athletics stadiums.



Flexible polyurethane
interlayer with SBR

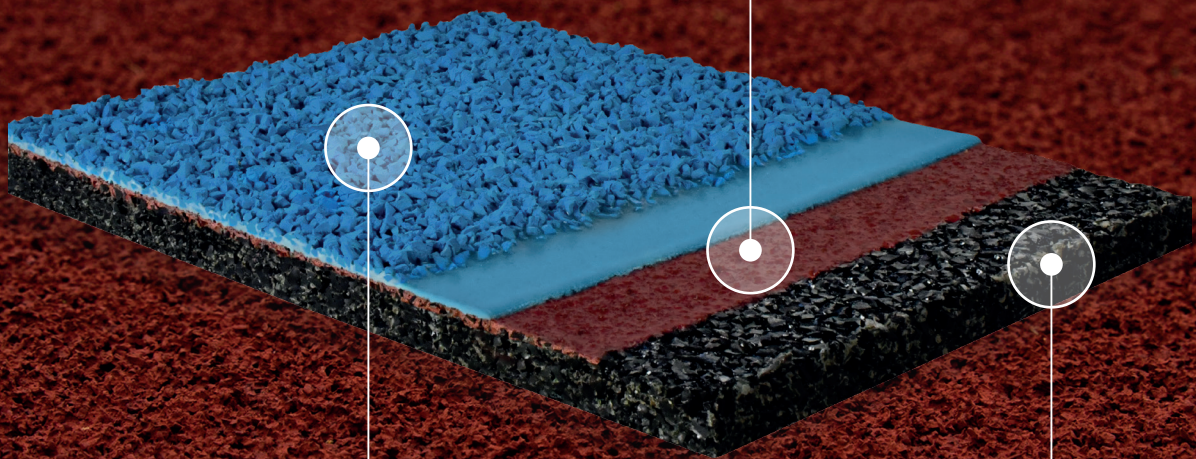

Flexible polyurethane
top layer, broadcast
with coloured EPDM

Bonded SBR
base layer

System specifications

	SR SPRINT SANDWICH	WORLD ATHLETICS REQUIREMENT
ABSOLUTE THICKNESS	13,0 mm	
FRICTION	76	> 47
TENSILE STRENGTH	0,52 MPa	> 0,50 MPa
ELONGATION AT BREAK	51 %	> 40 %
IMPACT ABSORPTION AT 23 °C	42 %	35 % - 50 %
VERTICAL DEFORMATION AT 23 °C	2.4 mm	0,6 - 2,5 mm

