


SR OLYMPIC FULL PU

OUTDOOR FLOORING

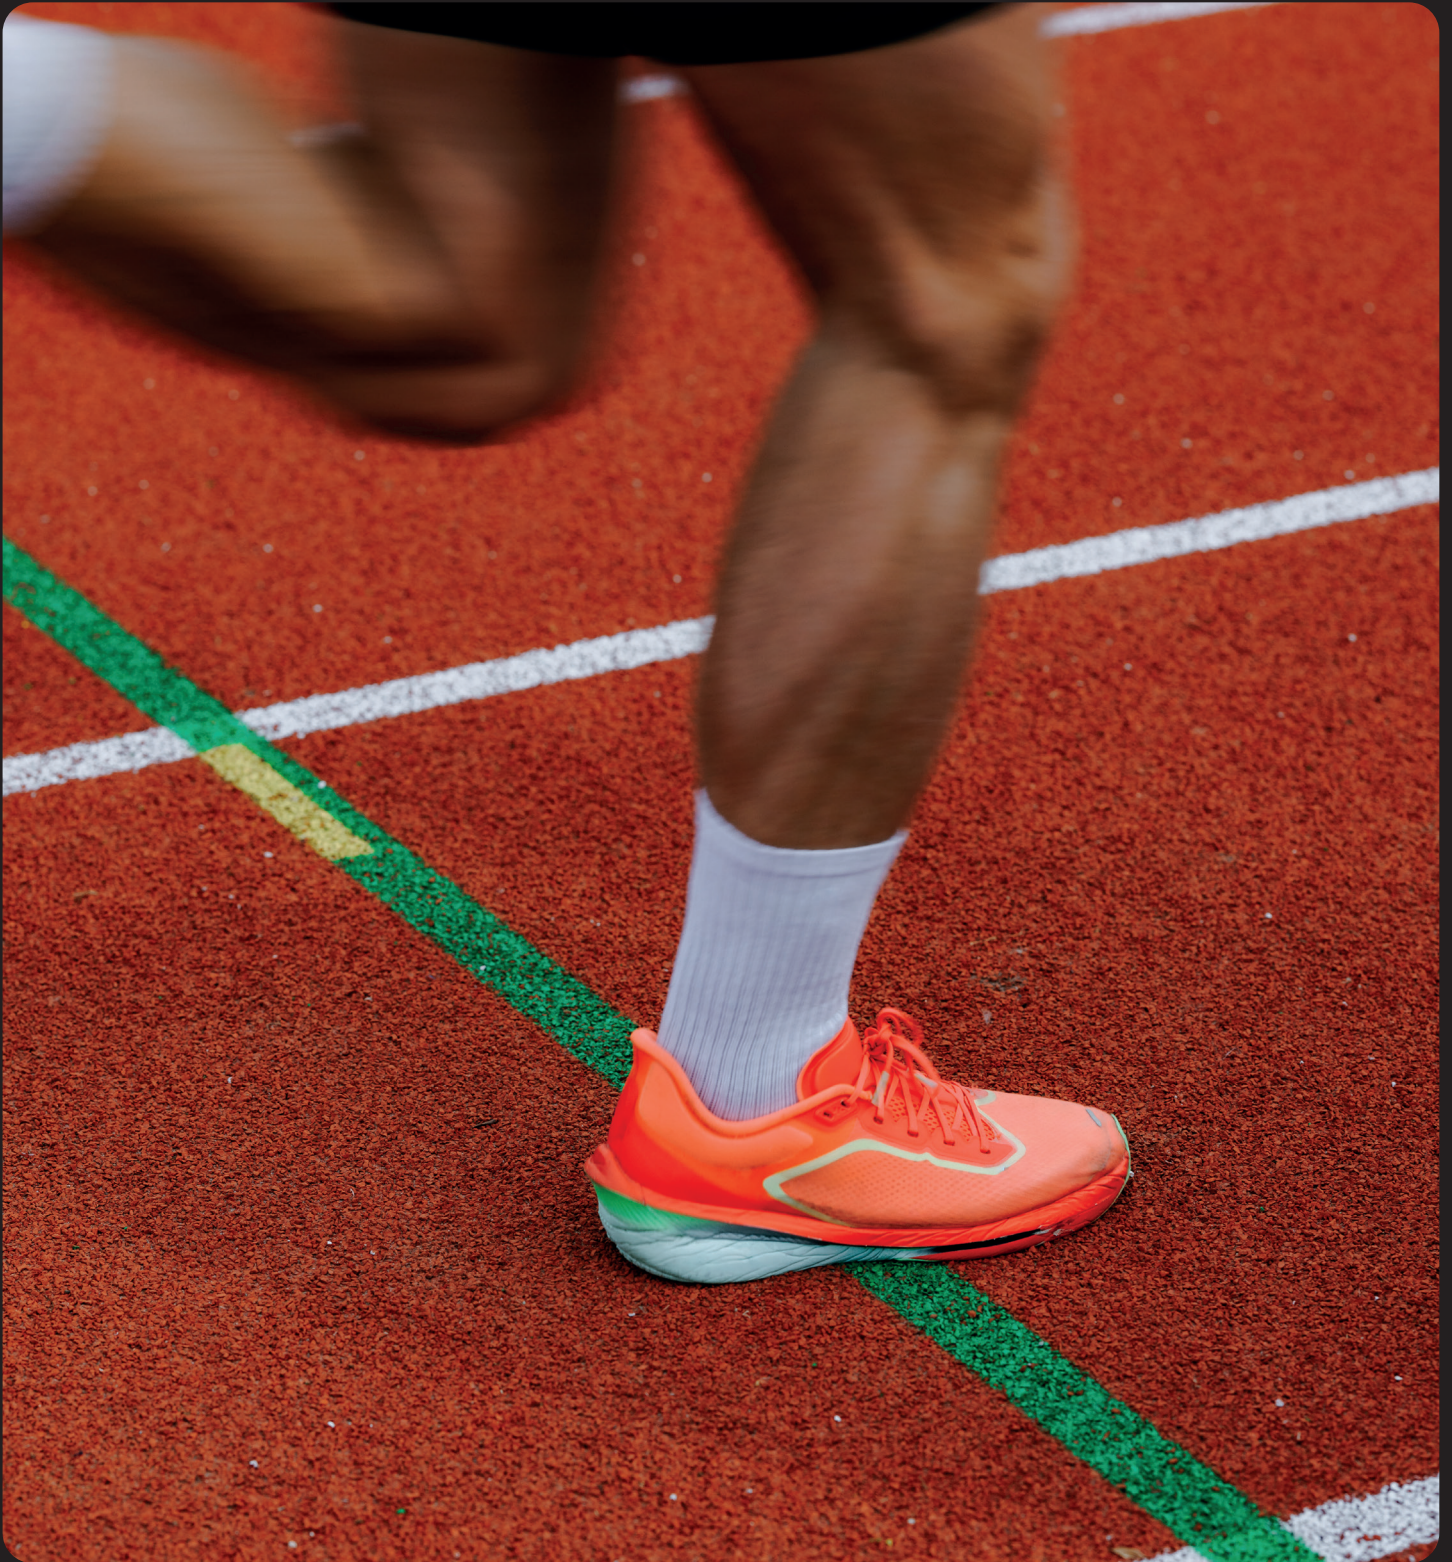

The.

Flooring.

Standard.

HERCULAN

World Athletics Certified

CERTIFIED PERFORMANCE FOR EVERY LEVEL


Developed for athletics tracks where there is no room for compromise, the Herculan SR Olympic Full PU guarantees top performance, safety and durability. The system meets the strictest international standards and is therefore ideally suited for both national and international competitions. Thanks to its World Athletics approval, the Herculan SR Olympic offers athletes an optimal competition surface – in all conditions.

The system consists of three high-quality, highly flexible polyurethane casting layers. The first two layers are embedded with SBR granules, made from recycled material, which ensure a comfortable running experience. The final layer is embedded with coloured EPDM granules, which give this system its unique performance level.

Thanks to its water-impermeable, spike- and UV-resistant properties, the system can withstand intensive use and a wide range of weather conditions. Its durable composition makes the Herculan SR Olympic Full PU a reliable choice for athletics tracks that need to deliver maximum performance.



Flexible polyurethane
interlayer with SBR

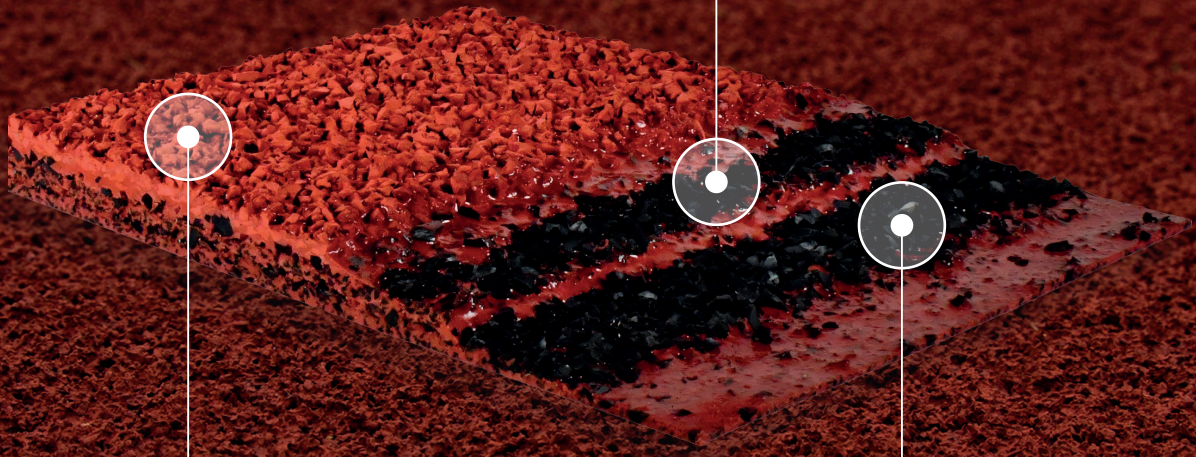

Flexible polyurethane
top layer, broadcast
with coloured EPDM

Flexible polyurethane
base layer with SBR

System specifications

	SR OLYMPIC FULL PU	WORLD ATHLETICS REQUIREMENT
ABSOLUTE THICKNESS	18,0 mm	
FRICTION	56	> 47
TENSILE STRENGTH	0,54 MP _A	> 0,50 MP _A
ELONGATION AT BREAK	42 %	> 40 %
IMPACT ABSORPTION AT 23 °C	39 %	35 % - 50 %
VERTICAL DEFORMATION AT 23 °C	2,1 mm	0,6 - 2,5 mm



WWW.HERCULAN.COM